

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053376 A1**

- (51) International Patent Classification<sup>7</sup>: **F16L 15/04**
- (21) International Application Number:  
PCT/EP2003/014843
- (22) International Filing Date:  
28 November 2003 (28.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0215541 9 December 2002 (09.12.2002) FR
- (74) Agent: **ROUSSET, Jean-Claude**; Cabinet Netter, 36, avenue Hoche, F-75008 Paris (FR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicants (*for all designated States except US*): **VALLOUREC MANNESMANN OIL & GAS FRANCE** [FR/FR]; 54, rue Anatole France, 59620 Aulnoye-Aymeries (FR). **SUMITOMO METAL INDUSTRIES, LTD.** [JP/JP]; 5-33, Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka 541-0041 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **ROUSSIE, Gabriel** [FR/FR]; 6, rue Hautefois, F-59242 Cappelle en Pévèle (FR).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR PRODUCING A THREADED TUBULAR CONNECTION SEALED TO THE OUTSIDE

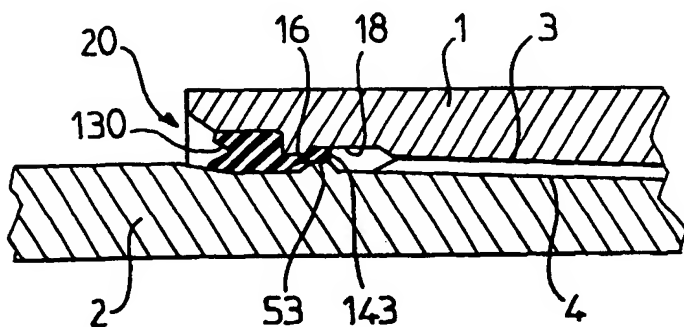

(57) Abstract: In a threaded connection with tapered male and female threads (3, 4), an annular housing (20) is provided in the vicinity of the free end of the female element (2), which housing receives a portion of a deformable sealing ring (130), which is radially compressed, while a retaining lip (143) of the ring (130) is immobilized in a further annular housing (18) of the female element by a rib (53) on the male element. Application for connecting pipes for hydrocarbon wells.